



Mechanical water sensor WaterSensor eco

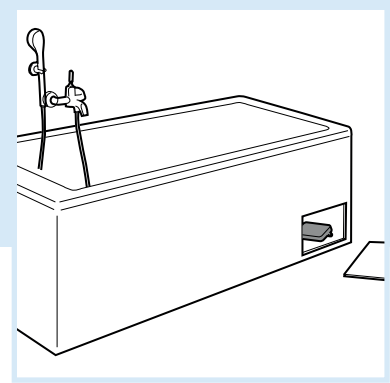

- Flexible location-independent use anywhere in buildings
- No battery, no cables required
- Wireless transmission without power supply in the case of state transitions



Application For the detection of accumulations of water at defined horizontal surfaces or positions (e.g. below pipes, fittings and in the area of washing machines in basements or utility rooms; below bath tubs or dishwashers in flats). Suitable for water.

Description WaterSensor eco is equipped with fibre disks that work as a sensor; it does not require an additional power supply. In the case of a leak, the fibre disks expand and generate the required power to send the event message to WaterControl 01 or to the AFRISO Gateway. The event message is sent when the fibre disks expand or shrink. WaterControl 01 can be used, for example, to shut off the water pipe to keep further water from escaping. The AFRISO Gateway transmits alarm messages and state transition messages via WLAN, LAN and GSM to the person in charge (for example, to the owner, the facility manager, the janitor or other configured contacts); the message includes information on which WaterSensor eco has signalled the state transition. The AFRISO Gateway in conjunction with additional AFRISO products with EnOcean® wireless technology allows the user to configure a whole range of fully customisable, extensible applications.

Technical specifications

Operating temperature range
 Ambient: -25/+65 °C
 Storage: -25/+65 °C
 Medium: 1/65 °C

Response level
 1.5 mm

Response delay
 < 6 min (first 5 response)
 up to 1 (6th to 10th response)

Supply voltage
 Energy harvesting (via fibre disks)

Housing
 WxHxD: 80 x 55 x 30 mm
 Weight: 66 g
 Degree of protection: IP 43 (EN 60529)

EnOcean® wireless
 Frequency: 868.3 MHz
 Transmission power: Max. 10 mW
 Range: 10 to 30 m (depending on room arrangement and materials in the building)

- Scope of delivery**
- WaterSensor eco
 - Adhesive tape
- Necessary additional components**
- WaterControl 01 and/or
 - AFRISO Gateway

i See operating instructions for detailed information on the range of the EnOcean® wireless module.

DG: G	Part no.	Price €
WaterSensor eco	55080	