


## EnOcean Easyclickpro flush-mounting JR receiver

Product Data Sheet

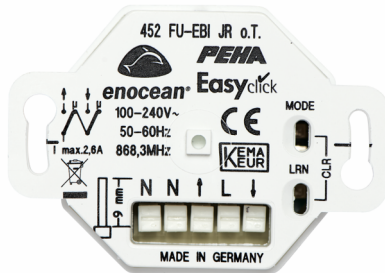

|  |                         |
|--|-------------------------|
| Current supply                               | 230 V AC                |
| Mounting method                              | Flush mounted (plaster) |
| Colour                                       | White                   |
| Suitable for degree of protection (IP)       | IP20                    |
| Suitable for venetian-/roller shutter switch | Yes                     |
| Push button mode                             | Yes                     |
| Switching mode                               | No                      |
| With radio controlled push button            | No                      |
| Halogen free                                 | Yes                     |
| Radio frequency                              | 868Megahertz            |
| 2 channel                                    | no                      |
| bi-directional                               | yes                     |
| energy metering                              | no                      |
| potential-free contact                       | no                      |

## EnOcean Easyclickpro flush-mounting JR receiver

The bidirectional Easyclick roller/shutter receiver can not only receive radio signals, but also transmits back its status every time it changes. For instance, the top/bottom end position of a shutter/blind can be depicted as a virtual image and visualised e.g. on the handheld transmitter D 450 FU-HS 128. The Easyclick receiver is designed to regulate shutters and blinds. A range of functions and parameters can be selected:

- two-key operation UP/STOP/DOWN with slat adjust (standard function blind)
- two-key operation UP/STOP/DOWN w/o slat adjust (standard function shutter)
- jog mode (ON/OFF)
- one-key operation UP/STOP/DOWN
- safety lock for maintenance work
- automatic ON/OFF
- sun sensor / twilight sensor / wind sensor / rain sensor
- 4 possible positions TOP/BOTTOM for lighting scenes
- lockout protection with window contact / window handle
- A function can be defined individually for each of the max 32 programmed transmitters
- Integrated repeater functions (1 level / 2 level) can be switched ON for each project, irrespectively of the set functions
- Separate preassigned functions and parameters when e.g. window contacts and window handles are being programmed

#### Technical data:

- Own consumption: < 0.5 W (bistable relays)
- Transmit frequency: 868.3 MHz
- Voltage supply: 100–240 Vac/ 50–60 Hz
- Neutral conductor: required
- Ambient temperature: -20 °C to +40 °C
- Storage temperature: -40 °C to +85 °C
- Plugin terminals: max 1 x 1.5 mm<sup>2</sup>
- Housing height: 28 mm
- Rating: IP 20
- Mounting lugs: for screwing down in switch sockets
- Approvals: CE; KEMA/KEUR
- Connecting data: I max 1.0 A

| Material No. | Article No.          | EAN-code      |
|--------------|----------------------|---------------|
| 00364356     | D 452 FU-EBI JR O.T. | 4010105364354 |

---

#### PEHA Elektro GmbH & Co.KG

a Honeywell Company  
Daimlerstraße 4  
58553 HALVER  
DEUTSCHLAND

Tel.: 02353 9118 001  
Fax: 02353 9118 311  
mail: [peha@honeywell.de](mailto:peha@honeywell.de)  
[www.peha.de](http://www.peha.de)

Änderungen vorbehalten. © Honeywell PEHA