


# SMART ENOCEAN GATEWAY (DC-GW/EO-IP)

## TECHNICAL PRODUCT SHEET



### DESCRIPTION

- IP-Gateway that translates EnOcean-Radio Communication (Energy Harvesting Wireless Technology) into different IP-worlds
- Web interface to view, control or manage EnOcean devices
- Multiple client connections possible
- Supports standard EnOcean profiles as well as manufacture specific profiles
- Update capability for future EnOcean products
- No limits regarding the amount of sensors and actuators which can be used
- Simple API, string based (tcp) and powerful API REST/JSON based (http)
- Flexible and energy efficient hardware

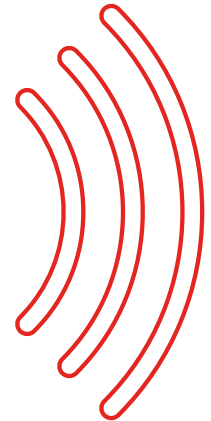

### Features

- IoT development kit for Intelligent Buildings
- Fully open bidirectional REST/JSON API with device administration for a seamless integration in any existing ecosystem
- Monitor or publish your data to the cloud easily by using the provided tool Node-Red (Azure, PubNub and more)
- Out of the box integration with the IBM Watson IoT Platform and TRIRIGA / Presence Insights

### Delivery contents

Smart EnOcean Gateway  
antenna  
wall mount  
power supply (230 V AC, 5 V DC, 2 A)  
DINrail adapter



### Out of the box

Node RED-Connector  
IBM-Watson-Connector

### Data

dimensions (HxWxD): 41 x 72 x 109 mm  
weight: 285 g  
power usage: 3.0 W (maximum)