


**EnOcean Easyclickpro module Switching,
2 channel, 16A, 2 HP**

Product Data Sheet

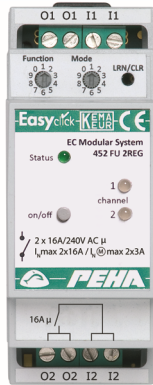

Other bus systems	Other
Mounting method	DRA (DIN-rail adapter)
Width in number of modular spacings	2
Local operation/hand operation	Yes
With LED indication	Yes
Max. switching power	3500Watt
Suitable for C-load	Yes
Max. number of switching contacts	2
Different phases connectable	No
Bus connection included	Yes
Modular expandability	Yes
2 channel 16 amps	yes
4 channel 10 amps	no
power supply included	no

**EnOcean Easyclickpro module Switching,
2 channel, 16A, 2 HP**

The EnOcean Easyclick switching module receives its telegrams via the external Easyclick aerial module and uses its power sections to implement the configured functions and parameters. The Easyclick modules are linked to each other with modular plug-in cables. The Easyclick switching module is used to switch lights and other electrical consumers based on a range of functions and parameters configured at rotary switches. The two channels can be programmed independently of each other, and a function can be defined individually for each programmed transmitter.

Standard function: 2-key ON/OFF function. The functions selected can be e.g. 1-key function, time functions, fan control, window contact, lighting scene control, hotel card switch, time controlled power shutoff, temperature control, etc.

Technical data:

DRA device for mounting on 36 mm DIN rails (2 HP)

Own consumption: standby = approx 0.25 W; operation = approx 46 mA / 1.1 W

2 relay outputs 16 A

Rotary switches for functions and parameters

Modular socket

LRN/CLR button

LED status display

incl 30 cm connecting cable

Rating: IP 20

Approvals: CE, KEMA/KEUR

Material No.	Article No.	EAN-code
00324873	D 452 FU 2REG	4010105324877

PEHA Elektro GmbH & Co.KG

a Honeywell Company

Daimlerstraße 4

58553 HALVER

DEUTSCHLAND

Tel.: 02353 9118 001

Fax: 02353 9118 311

mail: peha@honeywell.de

www.peha.de

Änderungen vorbehalten. © Honeywell PEHA