


## EnOcean Easyclickpro flush-mounting receiver, 1 channel, potential-free contact

Product Data Sheet

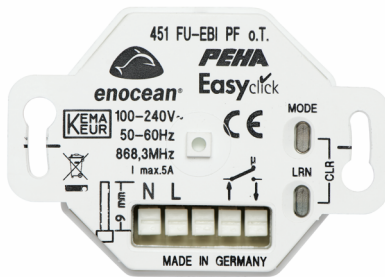

Current supply	230 V AC
Mounting method	Flush mounted (plaster)
Colour	White
Suitable for degree of protection (IP)	IP20
Suitable for venetian-/roller shutter switch	No
Push button mode	Yes
Switching mode	Yes
With radio controlled push button	No
Number of relays	1
Halogen free	Yes
Radio frequency	868Megahertz
2 channel	no
bi-directional	yes
energy metering	no
potential-free contact	yes

## EnOcean Easyclickpro flush-mounting receiver, 1 channel, potential-free contact

The bidirectional Easyclick receiver can not only receive radio signals, but also transmits back its status every time it changes. Actual ON/OFF switched states can then be visualised e.g. on the handheld transmitter D 450 FU-HS 128. The Easyclick receiver with potential-free contact serves to switch lights and other electrical consumers. A range of functions and parameters can be selected: • two-key operation ON/OFF (standard function) • button operation (pulse) • hotel card switch with definable follow-up time • stairwell light with selectable running time and shutdown warning • automatic OFF after selectable running time • fan function with delayed ON and with selectable follow-up time • save and retrieve 4 lighting scenes at the press of a key (one lighting scene per key) • window handle and window contact, visualisation also parallel to the switching outputs • movement detector and light sensor • A function can be defined individually for each of the max 32 programmed transmitters • Integrated repeater functions (1 level / 2 level) can be switched ON for each project, irrespectively of the set functions • Separate preassigned functions and parameters when e.g. window contacts, window handles, and movement detectors are being programmed

### Technical data:

Own consumption: < 0.5 W (bistable relay)

Transmit frequency: 868.3 MHz

Voltage supply: 100–240 Vac/ 50–60 Hz

Neutral conductor: required

Ambient temperature: -20 °C to +40 °C

Storage temperature: -40 °C to +85 °C

Plugin terminals: max 1 x 1.5 mm<sup>2</sup>

Housing height: 28 mm

Rating: IP 20

Mounting lugs: for screwing down in switch sockets

Approvals: CE; KEMA/KEUR

Load types 230 Vac (110 Vac) [30 Vdc]

Incandescent lamps 1200 W (600 W) [150 W]

HV halogen lamps 600 W (300 W) [75 W]

Material No.	Article No.	EAN-code
00364476	D 451 FU-EBI PF O.T.	4010105364477

---

### PEHA Elektro GmbH & Co.KG

a Honeywell Company  
Daimlerstraße 4  
58553 HALVER  
DEUTSCHLAND

Tel.: 02353 9118 001  
Fax: 02353 9118 311  
mail: [peha@honeywell.de](mailto:peha@honeywell.de)  
[www.peha.de](http://www.peha.de)

Änderungen vorbehalten. © Honeywell PEHA