


EnOcean Easyclickpro module Switching with SPV, 4 channel, 4 HP

Product Data Sheet

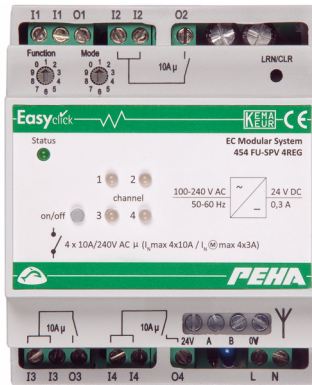

| | |
|-------------------------------------|------------------------|
| Other bus systems | Other |
| Mounting method | DRA (DIN-rail adapter) |
| Width in number of modular spacings | 4 |
| Local operation/hand operation | Yes |
| With LED indication | Yes |
| Max. switching power | 2300Watt |
| Max. number of switching contacts | 4 |
| Different phases connectable | No |
| Bus connection included | Yes |
| Modular expandability | Yes |
| 2 channel 16 amps | no |
| 4 channel 10 amps | yes |
| power supply included | yes |

EnOcean Easyclickpro module Switching with SPV, 4 channel, 4 HP

The EnOcean Easyclick switching module receives its telegrams via the external Easyclick aerial module and uses its power sections to implement the configured functions and parameters. The Easyclick switching module unit is fitted with its own voltage supply and can therefore be linked with modular plug-in cables to additional Easyclick modules like e.g. dimming, JR, etc. An additional Easyclick voltage supply module is available for further enhancements. The Easyclick switching module is used to switch lights and other electrical consumers based on a range of functions and parameters configured at rotary switches. The four channels can be programmed independently of each other, and a function can be defined individually for each programmed transmitter. Standard function: 2-key ON/OFF function. The functions selected can be e.g. 1-key function, time functions, fan control, window contact, lighting scene control, hotel card switch, time controlled power shutoff, temperature control, etc.

Technical data:

DRA device for mounting on 72 mm DIN rails (4 HP)
Own consumption: standby = less than 1 W operation = max 100 mA / 2.4 W
4 relay outputs 10 A rotary switches for functions and parameters
LRN/CLR button
LED status display
incl voltage supply 230 V AC/24 V DC
Modular sockets
Connecting terminals for the RS485 bus (aerial)
incl 30 cm connecting cable
Rating: IP 20
Approvals: CE, KEMA/KEUR

| Material No. | Article No. | EAN-code |
|--------------|-------------------|---------------|
| 00377836 | D 454 FU-SPV 4REG | 4010105377835 |

PEHA Elektro GmbH & Co.KG

a Honeywell Company
Daimlerstraße 4
58553 HALVER
DEUTSCHLAND

Tel.: 02353 9118 001
Fax: 02353 9118 311
mail: peha@honeywell.de
www.peha.de

Änderungen vorbehalten. © Honeywell PEHA