


**EnOcean Easyclickpro module  
UNI dimming, 1 channel, 2 HP**

**Product Data Sheet**

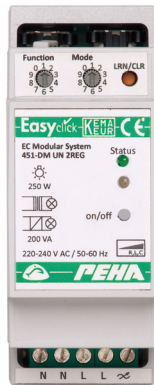

Other bus systems	Other
Model	Dimming actuator
Mounting method	DRA (DIN-rail adapter)
Type of load	Universal
Degree of protection (IP)	IP20
Bus connection included	Yes
Bus module detachable	No
Substation input	No
Local operation/hand operation	Yes
With LED indication	Yes
Number of outputs	1
Output power	15-250Watt
Voltage	220-240Volt
Parallel-service possible	No
Frequency	50-60Hertz

**EnOcean Easyclickpro module  
UNI dimming, 1 channel, 2 HP**

The EnOcean Easyclick UNI dimming module receives its telegrams via the external Easyclick aerial module and uses its power sections to implement the configured functions and parameters. The Easyclick modules are linked to each other with modular plug-in cables. The Easyclick UNI dimming module is used to switch and dim lights based on a range of functions and parameters configured at rotary switches. A function can be defined individually for each programmed transmitter. Standard function: 2-key ON/OFF/DIM function with memory. Selected functions include e.g. 2-key function with brightness preset, 1-key function with memory, time functions, lighting scene control, etc.

## Technical data:

DRA device for mounting on 36 mm DIN rails (2 HP)

Own consumption standby = approx 0.29 W operation = approx 20 mA / 0.48 W

Universal dimmer with 1 channel for R, L, and C loads. min load 15 W and 20 VA, max 250 W and 200 VA

Rotary switches for functions and parameters

LRN/CLR button

LED status display

Modular sockets

incl 30 cm connecting cable

Rating: IP 20

Approvals: CE, KEMA/KEUR

Material No.	Article No.	EAN-code
00377876	D 451 FU-DM UN 2REG	4010105377873

**PEHA Elektro GmbH & Co.KG**

a Honeywell Company

Daimlerstraße 4

58553 HALVER

DEUTSCHLAND

Tel.: 02353 9118 001

Fax: 02353 9118 311

mail: [peha@honeywell.de](mailto:peha@honeywell.de)[www.peha.de](http://www.peha.de)

Änderungen vorbehalten. © Honeywell PEHA