


**EnOcean Easyclickpro module JR,
4 channel, 2 HP, for 2 blinds/shutters**

Product Data Sheet

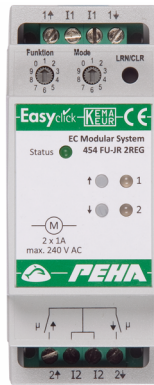

Mounting method	DRA (DIN-rail adapter)
Degree of protection (IP)	IP20
Width in number of modular spacings	2
Number of inputs	0
Switching current (resistive)	1Ampere
Max. number of venetian-blind outputs	2

EnOcean Easyclickpro module JR, 4 channel, 2 HP, for 2 blinds/shutters

The EnOcean Easyclick JR module for 2 blinds/shutters receives its telegrams via the external Easyclick aerial module and uses its power sections to implement the configured functions and parameters. The Easyclick modules are linked to each other with modular plug-in cables. The Easyclick JR module is used to regulate blinds/shutters based on a range of functions and parameters configured at rotary switches. A function can be defined individually for each programmed transmitter. Standard function: UP/STOP/DOWN with slat adjust. Selected functions include e.g. UP/STOP/DOWN w/o slat adjust, slat adjust ON/OFF, safety function for blocking, UP/ DOWN lighting scenes, etc.

Technical data:

DRA device for mounting on 36 mm DIN rails (2 HP)
Own consumption: standby = approx 0.4 W operation = approx 21 mA / 0.51 W
4 relay outputs for two 230 Vac motor blinds/shutters (max 1 A)
Rotary switches for functions and parameters
LRN/CLR button
LED status display
Modular sockets
incl 30 cm connecting cable
Rating: IP 20
Approvals: CE, KEMA/KEUR

Material No.	Article No.	EAN-code
00377937	D 454 FU-JR 2REG	4010105377934

PEHA Elektro GmbH & Co.KG

a Honeywell Company
Daimlerstraße 4
58553 HALVER
DEUTSCHLAND

Tel.: 02353 9118 001
Fax: 02353 9118 311
mail: peha@honeywell.de
www.peha.de

Änderungen vorbehalten. © Honeywell PEHA