

---

## BL-201-00-868 UP BROADCAST EnOcean-DALI-Controller

**Light controller with fixed functionality: DALI ballasts all On / Off / Dim via broadcast, single rocker**

**Part nr. 11042**

Interfaces: 1x DALI Master, 1x EnOcean Master bidirectional, supply voltage: 230V AC

---



# DALI

The **BL-201-00-868 UP BROADCAST** EnOcean-DALI-Controller provides one DALI master and an integrated DALI power supply for the direct connection of up to 17 slaves (Iout max.= 34 mA), without a separate DALI power supply.

Also an EnOcean wireless transceiver is integrated. This allows the smart and easy integration and combination of DALI ballasts or DALI LED drivers and light switches with wireless EnOcean technology. The device is supplied by 230 V AC line voltage.

Up to 17 DALI ballasts can be operated and dimmed simultaneously via **DALI BROADCAST** with a single rocker as a fixed function.

---

## Technical data

### Interfaces

Type	DALI Master
Number	1
Output current	Max. 34 mA (17 slaves)
Output voltage	Typ. 16V DC (+/- 5%)
Galvanic isolation	Yes

Type	EnOcean Master
Number	1
Transmit / Receive frequency	868.0 MHz / ASK
Occupied frequency band	868.0 – 868.6 MHz
Maximum transmission power	Typ. 3 dBm @ 868.300 MHz
EN 300200 receiver category	2

### User interfaces

Service button	Yes, 1, at the side
Service LED	1x, red

### Housing / connectors

Connection technology	Screw contacts, max. 1,0mm <sup>2</sup> flexible with cable end sleeves, or 1,5mm <sup>2</sup> inflexible
Housing	UL-V0, black, for in-wall housing

### Power supply

Supply voltage	230V AC
Power consumption	Typ. 2.8W, max 4.0W

### Environmental conditions

Operating temperature	+5°..+50°C
Storage temperature	-20°..+70°C
Humidity	10..95% rel. Humidity, non condensing
Protection class	IP20

### Dimensions and weight

Weight	40g
Dimensions	51x51x33 mm

### Standards / approvals

CE	2014/53/EU RED directive 2011/65/EU RoHS directive
Approvals / tests	DIN EN 60950-1:2011 + A12 Cor. 1:2012 + Cor. 1:2012 EN 61000-6-2:2005 EN 61000-6-3:2007 + A1:2011 + Cor 1:2012 EN 301 489-1:2011 V1.9.2 EN 301 489-3:2013 V1.6.1 EN 300 220-2:2012 V2.4.1

## Short description

---

### Supply voltage

The BL-201-00-868 UP BROADCAST is supplied with 230 V AC line voltage.

### DALI Master

The BL-201-00-868 UP BROADCAST provides a DALI master according to the DALI specification. In addition, a DALI power supply is integrated. Up to 17 DALI ballasts (Imax = 34 mA) can be connected to the controller without an additional DALI power supply.

### EnOcean Master / bidirectional

The integrated transceiver of type TCM310 is used to communicate with EnOcean light switches. (RPS Telegram).

### Service button/ Service LED

The BL-201-00-868 UP BROADCAST offers a service button to teach in one or more light switches. By the red service LED, several status informations will be displayed. (see below)

## Controller functions

---

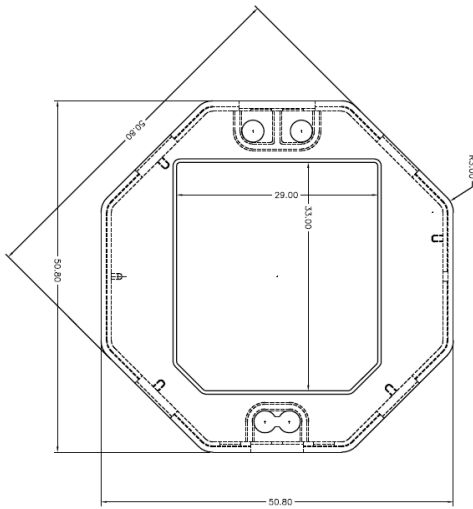
BL-201-00-868 UP BROADCAST: Single rocker to control DALI ballasts ON / OFF / DIM via broadcast:

Push service button $\leq 1$ sec.:	Sets BL-201-00-868 UP BROADCAST into learn-mode, service LED is steady on: EnOcean switch is pressed: Switch is paired with BL-201-00-868 UP BROADCAST
Push Service button $\geq 2$ sec.:	Service-LED will turn on for $< 1$ sec.: No more controller is paired with the BL-201
Keypress rocker top short:	Switch on all ballasts on DALI line
Keypress rocker bottom short:	Switch off all ballasts on DALI line
Keypress rocker top long:	Brighten of all DALI ballasts until key is released or 100% is reached.
Keypress rocker bottom long:	Dim of all DALI ballasts until key is released or 0% is reached.

---

**Dimensions: 51 x 51 x 33 mm**

---

**Ordering information**

Article text	Part number	Description
BL-201-00-868 UP BROADCAST	11042	EnOcean-DALI-Controller series BL-201 funktion: DALI Broadcast ON/OFF/DIM with single rocker 230V AC, 868MHz, in-wall housing

**EU Declaration of Conformity**

Hereby the DEUTA Controls GmbH declares that the radio equipment type **BL-201-00-868 UP BROADCAST** is compliant with the directive 2014/53/EU. You can download the complete EU Declaration of Conformity as a pdf-document on our homepage [www.deuta-controls.de](http://www.deuta-controls.de) in the area Service/Downloads (Dok. EUDC2017\_104).

Version 40, 28.06.2017