


LD-AS1/2/3

Wireless Switch

LD-AS is a wireless switch with relays that uses EnOcean wireless communication. The switch can be installed in a concealed box, connected to zero-fire wire, and comes in three models with 1, 2, and 3 relays.

The switch can be paired with an EnOcean wireless passive switch, and control can also be achieved through the wireless passive switch.

The switch can be added to the system via a gateway or receiver that supports EnOcean technology for remote control.

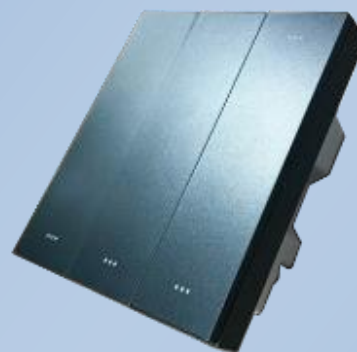

GENERAL DATA

Number of channels	1/2/3 channel
Temperature rang	0°C to +40°C
Relative humidity	0% to 95% r.h., no condensing
Storage and transport conditions	-25°C to +65°C, <90% r.h., no condensing

MECHANICAL DATA

Dimensions	Outer size: 86x86mm
Mounting hole distance	60mm
Installation	Rear panel: Screwed
Material	PC, Grey

ELECTRICAL DATA

Operating Voltage	100V~250V
Input cable	L、N
Output Current	10A/relay

WIRELESS DATA

Antenna	Internal
Radio technology	EnOcean, 868MHz
Modulation technology	ASK
Transmission range	300m free field, typ. 30m within buildings



Room 301 Huashen Building,
Ruanjian Avenue, Nanjing, Jiangsu
Province
China

Tel: +86 025 52609811
Fax: +86 025 52609811
cuijj@win-shine.com

