


## EnOcean Easyclickpro Valve actuator, batteryless

Product Data Sheet



Mounting method	Radiator valve
Degree of protection (IP)	IP40
Radio frequent bidirectional	Yes

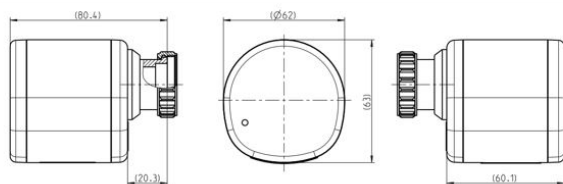

**EnOcean Easyclickpro Valve actuator,  
batteryless**

Wireless and batteryless radio valve actuator with integrated EnOcean radio interface for bidirectional communication with control and regulation units. The actuator has an integrated temperature sensor and can be used as an independent temperature controller as an alternative to actuator operation. The batteryless actuator uses the heat of the water in the radiator to generate energy.

## Technical data:

Power supply: thermal energy harvesting, Micro-USB connection (Typ B)  
Radio technology: EnOcean (IEC 14543-3-10)  
Frequency: 868 MHz  
Transmission power: < 10mW  
Direction of transmission: bi-directional  
EnOcean-Profil: EEP A5-20-01  
Display: Status-LED  
Measuring range: 0.. +40°C  
Actuating stroke: max. 3 mm / automatic adjustment  
Actuation time: 0,24 mm/s  
Ambient temperature: 0... +40 °C 70% rH  
Rating: IP40 according to DIN EN 60529  
Housing: PC, Aluminium, pure white  
Valve connection: screw mounting, M30 x 1.5

Material No.	Article No.	EAN-code
00324886	D 451 FU-E MSA3	4010105324884

**PEHA Elektro GmbH & Co.KG**

a Honeywell Company  
Daimlerstraße 4  
58553 HALVER  
DEUTSCHLAND

Tel.: 02353 9118 001  
Fax: 02353 9118 311  
mail: [peha@honeywell.de](mailto:peha@honeywell.de)  
[www.peha.de](http://www.peha.de)

Änderungen vorbehalten. © Honeywell PEHA